


KTU9-40H Dimensions


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

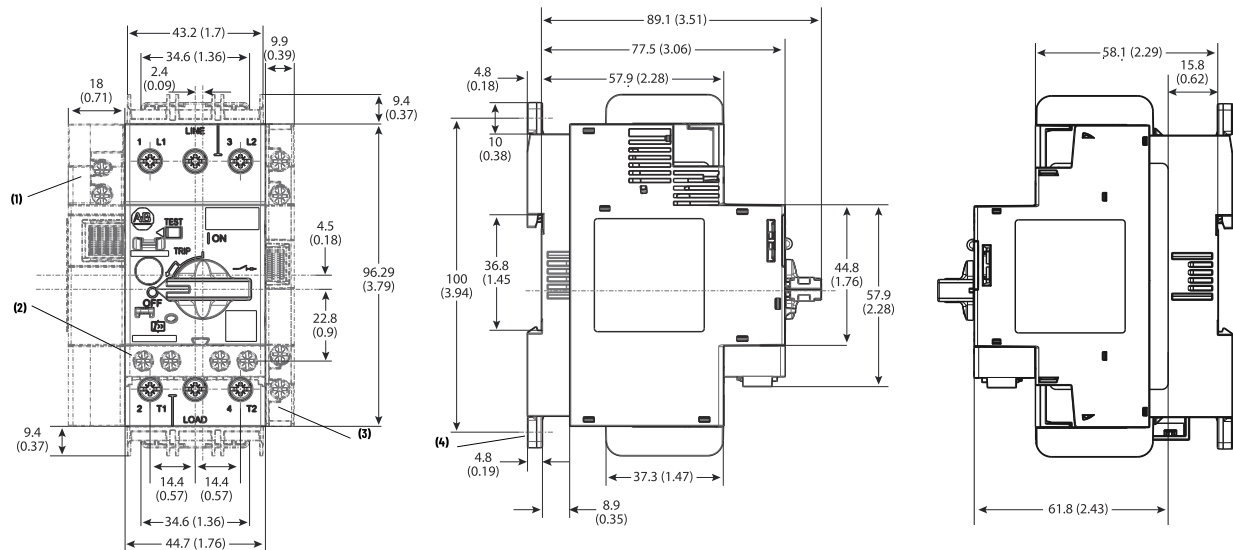


Note	Information
1	Undervoltage/shunt trip
2	Auxiliary contact (front mounted)
3	Auxiliary contact (side mounted)
4	Screw mounting adapter

KTU9 Wiring Diagram


**3-Phase
KTU9-40H-3D**

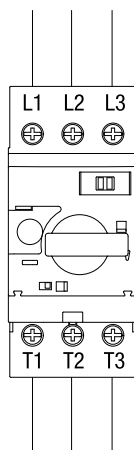


**2-Phase
KTU9-40H-2D**

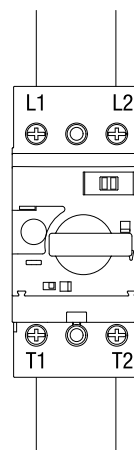

KTU9 with Screw Adaptor KT9-N45

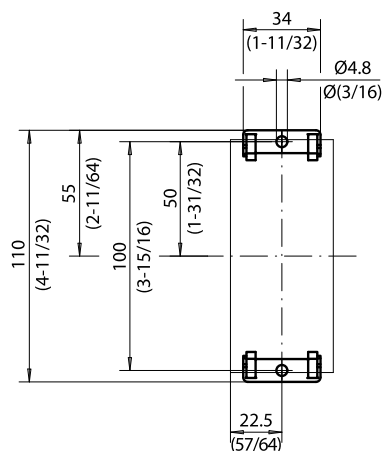


KTU9 Mounting Position

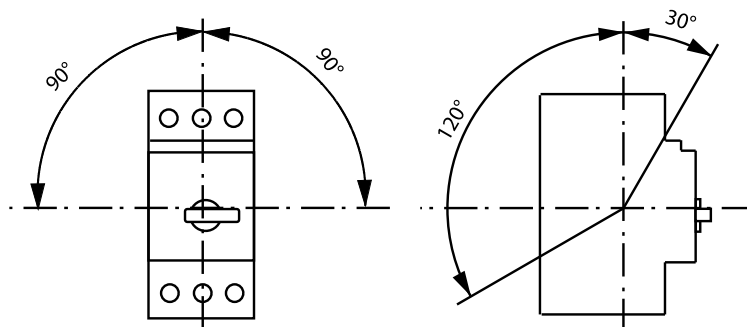

KTU9 Circuit Breaker Enclosure Requirements

Mounting Position and Spacing Requirements

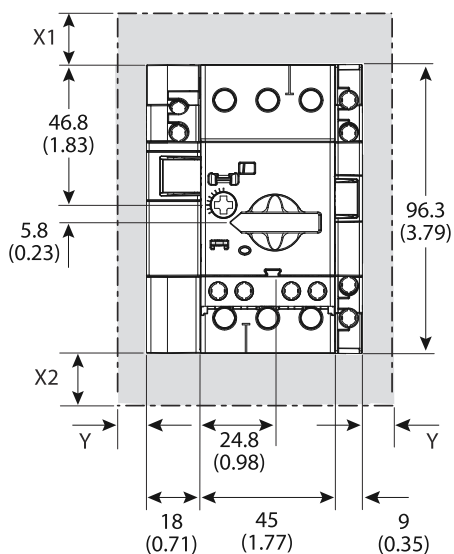

Voltage [V AC]	Minimum Distance to Grounded Parts or Walls [mm (in.)]		
	X1	X2	Y
400	30 (1-3/16)	30 (1-3/16)	9 (23/64)
500	30 (1-3/16)	30 (1-3/16)	9 (23/64)
690	50 (1-31/32)	50 (1-31/32)	30 (1-3/16)