
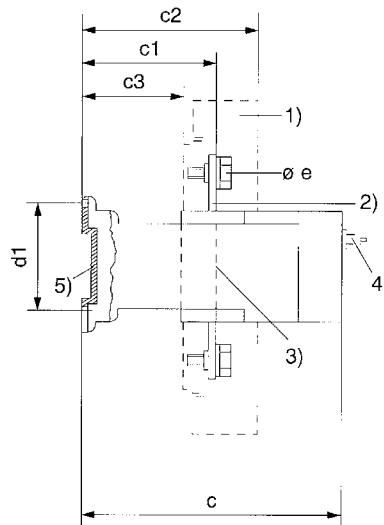


CEF1-11 & CEF1-12

- Dimensions are in millimeters (inches)
- Dimensions not intended for manufacturing purposes


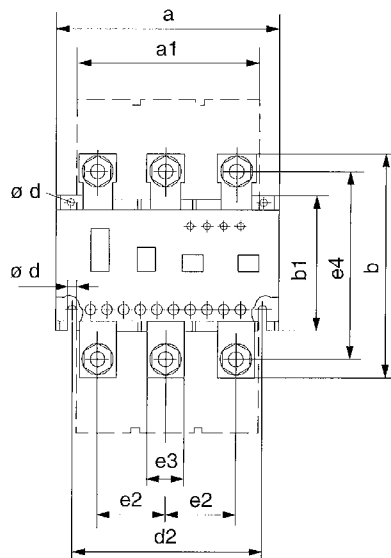


- 1) Touch protection
- 2) Bus bar for universal application (CWE4-VM)
- 3) Loop-through openings 19 x 19mm
- 4) With indication module CEL1; $c = c + 29\text{mm}$
- 5) Provision for mounting on a top-hat rail EN 50 022-35
- 6) CWE4-VM2

Cat. Num.	a	a1	b	b ⁶⁾	b1	Ød	d1	d2	Øe	Øe1	e2	e3	e4	e4 ¹⁾	c	c1	c2	c3
CEF1-11/12	120 (4-23/32)	105 (4-1/8)	100 (3-15/16)	119 (4-11/16)	73 (2-7/8)	5.4 (7/32)	55...60 (2-5/32...2-3/8)	100 (3-15/16)	M8 x 12	~	38.5 (1-17/32)	16 (5/16)	82 (3-7/32)	99 (3-29/32)	143 (1-11/16)	72 (2-27/32)	93.5 (3-11/16)	53.5 (2-1/8)

CEF1-41 & CEF1-42

- Dimensions are in millimeters (inches)
- Dimensions not intended for manufacturing purposes

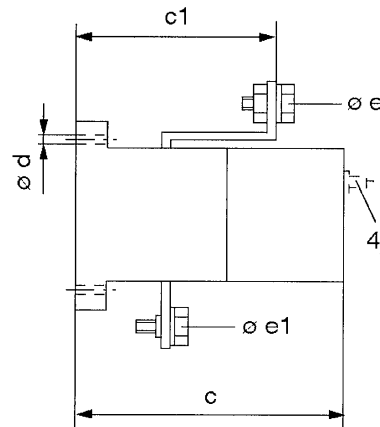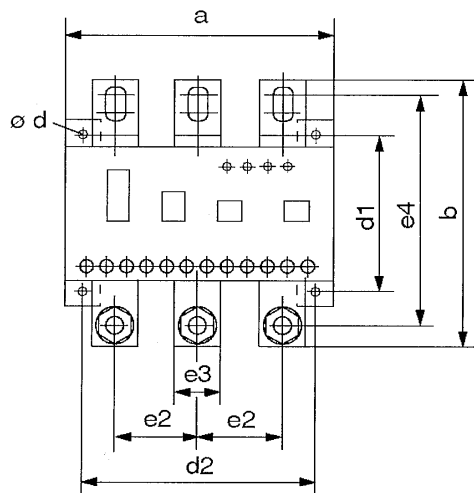


- 4) With indication module CEL1; $c = c + 29\text{mm}$
- 6) CWE4-VM2

Cat. Num.	a	a1	b	b ⁶⁾	b1	Ød	d1	d2	Øe	Øe1	e2	e3	e4	e4 ¹⁾	c	c1	c2	c3
CEF1-11/12	140 (5-17/32)	~	142 (5-20/32)	~	~	5.8 (1/4)	75 (2-31/32)	125 (4-29/32)	M10 x 25	M10 x 35	48 (1-29/32)	25 (1)	117 (4-7/32)	117 (4-7/32)	148 (5-13/16)	117 (4-7/32)	~	~

CEF1-52

- Dimensions are in millimeters (inches)
- Dimensions not intended for manufacturing purposes

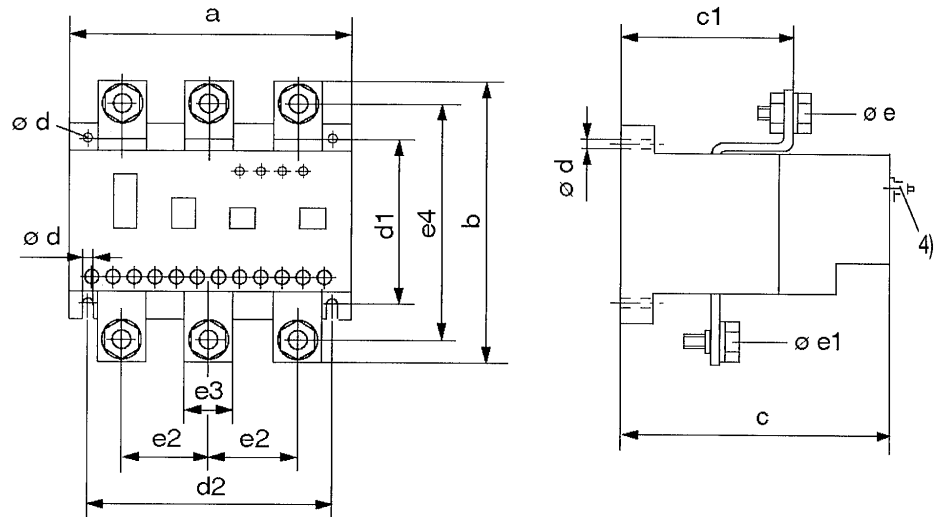


- 4) With indication module CEL1; $c = c + 29\text{mm}$
 6) CWE4-VM2

Cat. Num.	a	a1	b	b ⁶⁾	b1	Ød	d1	d2	Øe	Øe1	e2	e3	e4	e4 ¹⁾	c	c1	c2	c3
CEF1-52	155 (6-1/8)	~	143 (5-5/8)	~	~	6.5 (7/32)	90...93 (3-17/32...3-11/16)	135 (5-5/16)	M10 x 25	M10 x 25	48 (1-29/32)	25 (1)	118 (4-14)	113 (4-1/16)	178 (7)	118 (4-1/4)	~	~

CEF1-22 (Separate Mount)

- Dimensions are in decimal inches (millimeters)
- Dimensions not intended for manufacturing purposes

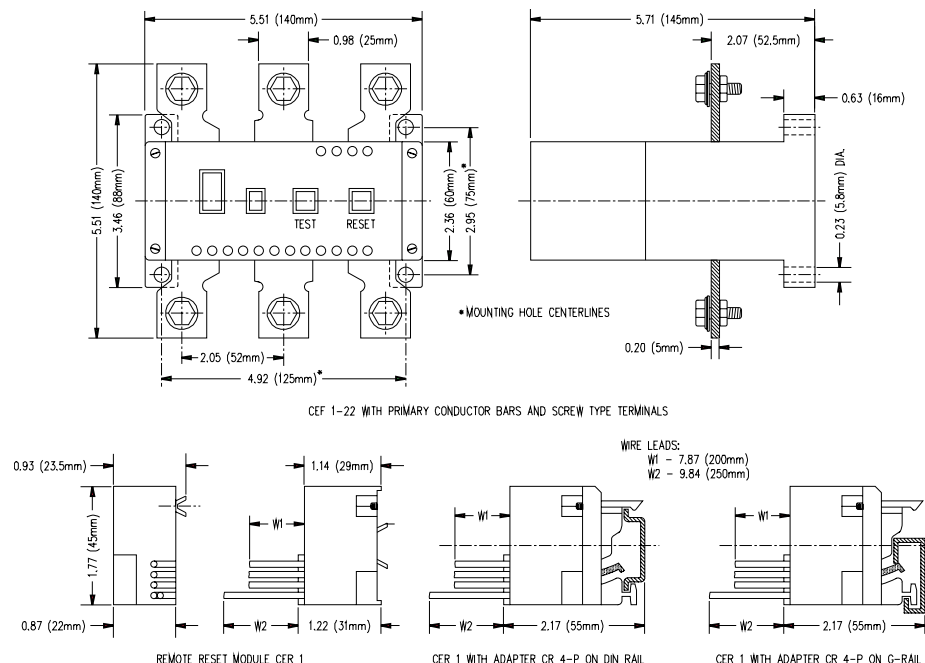

CEF 1-22 WITH PRIMARY CONDUCTOR BARS AND SCREW TYPE TERMINALS

REMOTE RESET MODULE CER 1

CER 1 WITH ADAPTER CR 4-P ON DIN RAIL

CER 1 WITH ADAPTER CR 4-P ON G-RAIL

CEL1 Remote Indicating Unit

- Dimensions are in millimeters
- Dimensions not intended for manufacturing purposes

