



208/240/380/480/600V  
24/120/240V

(OPTIONAL)

FORWARD STOP REVERSE PB

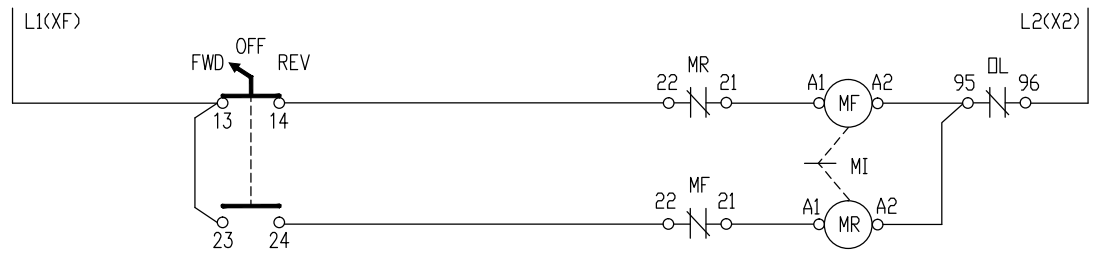

FORWARD OFF REVERSE SEL. SW.

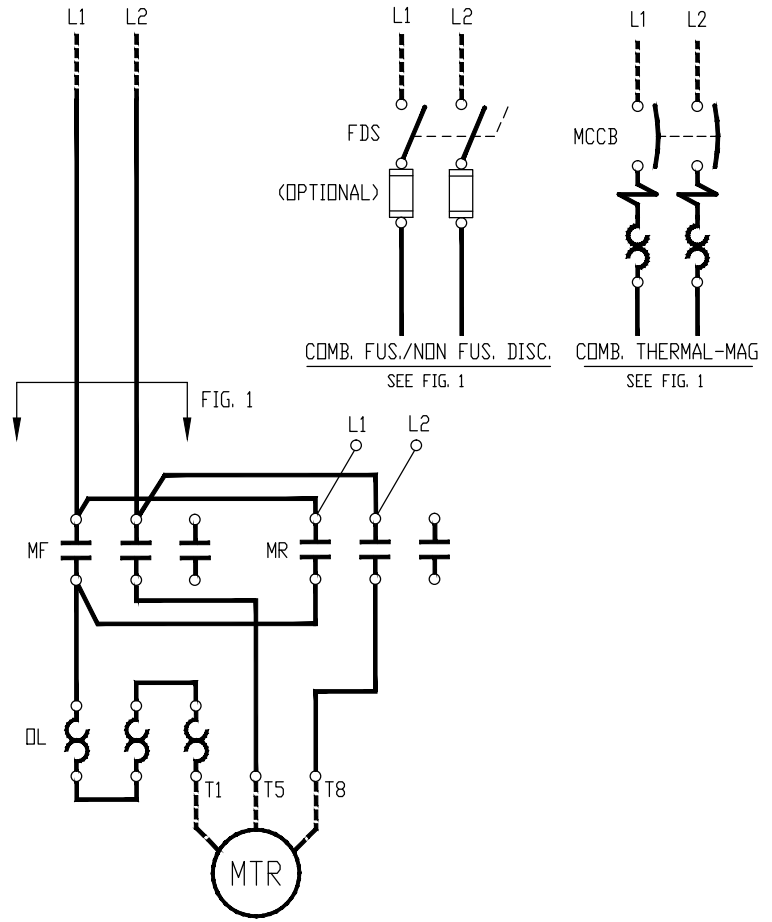

1-PH 3-LEAD REPULSION INDUCTION MOTOR

- NOTES:
- 1). X2 TERMINAL GROUNDED AS STANDARD, REMOVE IF NOT REQUIRED.
  - 2). MI STANDS FOR MECHANICAL INTERLOCK.

|                 |  |   |        |
|-----------------|--|---|--------|
| 6               | GENERAL REVISION   | 4-23-12                                     | MR     |
| REV             | DESCRIPTION  | DATE  | APP'D  |
| DESIGNED<br>EAP | <p>FULL VOLTAGE REVERSING<br/>MAGNETIC STARTER<br/>SINGLE PHASE - RECONNECTABLE<br/>3-LEAD REPULSION INDUCTION MOTOR</p> | <p><b>sprecher+schuh</b> HOUSTON, TEXAS</p> |        |
| DRAWN<br>EAP    |  |   |        |
| APPROVED<br>PAB |  |   |        |
| DATE<br>12-87   |  |   |        |
|                 |  | DWG. NO.                                    | SERIES |
|                 |  | CBUT WS-104-12                              | 100    |