


CUSTOMER WILL PROVIDE BRANCH CIRCUIT PROTECTION (F1)
SEE THE APPLICATION INSTRUCTION SHEET - COMPONENT SELECTION TABLES
FOR MAX. FUSE SIZE, CLASS, AND APPLICABLE SHORT CIRCUIT RATING
(USE 75°C COPPER WIRE ONLY)

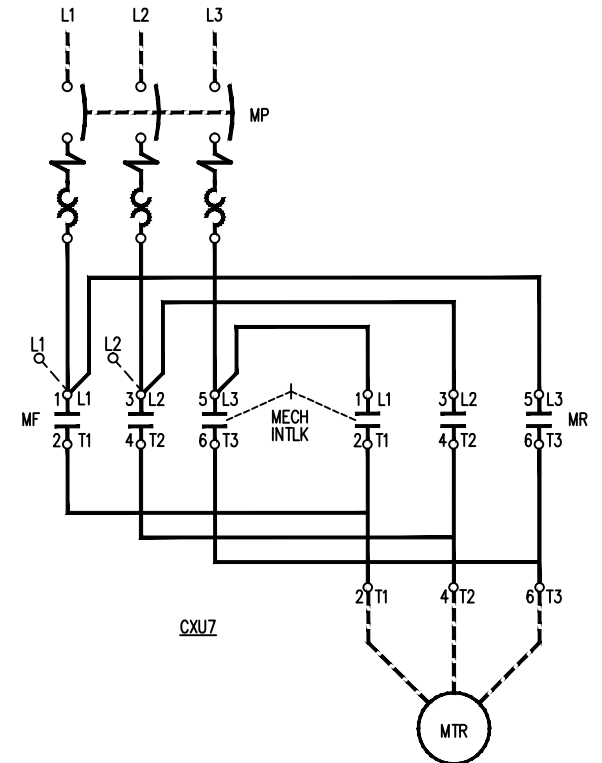

- NOTES:
1. MI: MECHANICAL INTERLOCK
 2. MP: KT7 "TYPE E" MOTOR CONTROLLER
 3. DO NOT CONNECT A1-A2 TO L1-L2 UNLESS COIL VOLTAGE MATCHES LINE VOLTAGE

| | | | |
|-----|--------|------|----|
| - | - | - | - |
| - | - | - | - |
| - | - | - | - |
| - | - | - | - |
| - | - | - | - |
| REV | CHANGE | DATE | BY |

NOTICE
THIS DRAWING IS THE CONFIDENTIAL
PROPERTY OF SPRECHER-SCHUH, INC.
and, as such, is subject to recall at
any time. The drawing may not be
reproduced, used or disclosed for
any purpose except as authorized by
SPRECHER-SCHUH, INC.

DRAWN BY:
WEH
CHECKED BY:
MLF
APPROVED BY:
--
DATE
09-24-2012

KWIKSTARTERS II
FULL VOLTAGE REVERSING
CXU7-9...23(E)-__-P*

**sprecher+
schuh** HOUSTON,
DWG. NO.
CXU7 WS-114-52