


L10 Disconnect Switch (100, 200 & 400A)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

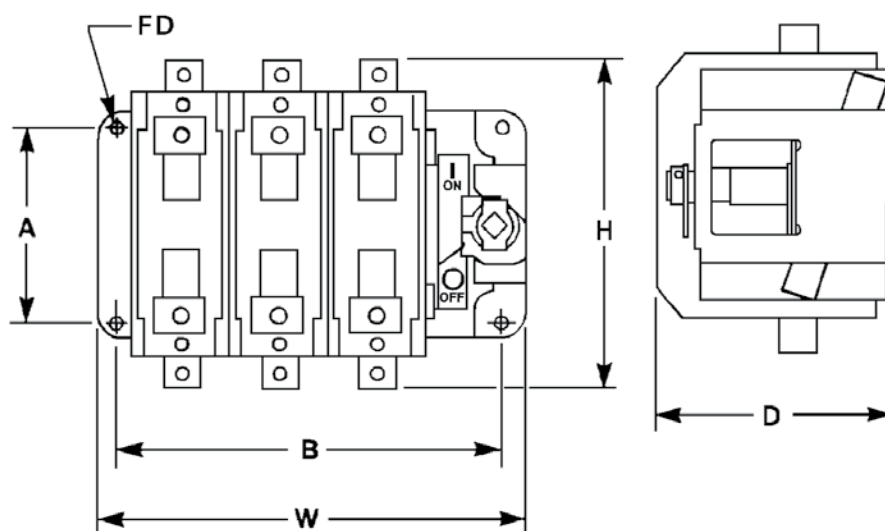

Disconnect Switch	Approximate Dimensions					
Dimension Reference	H	W	D	A	B	FD
C1	148 (5 53/64)	194 (7 41/64)	130 (5 7/8)	106 (4 11/64)	170 (6 11/16)	4-M6 (4 1/4)
D1	184 (7 1/4)	236 (9 19/64)	148 (5 53/64)	106 (4 11/64)	212 (8 11/32)	4-M6 (4 1/4)
E1	220 (8 21/32)	278 (10 15/16)	180 (7 3/32)	150 (5 29/32)	252 (9 59/64)	4-M8 (4 5/16)
F1	250 (9 27/32)	308 (12 1/8)	213 (8 25/64)	150 (5 29/32)	282 (11 7/64)	4-M8 (4 5/16)


L10-HM... Pistol Grip Switch Handle Assembly

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

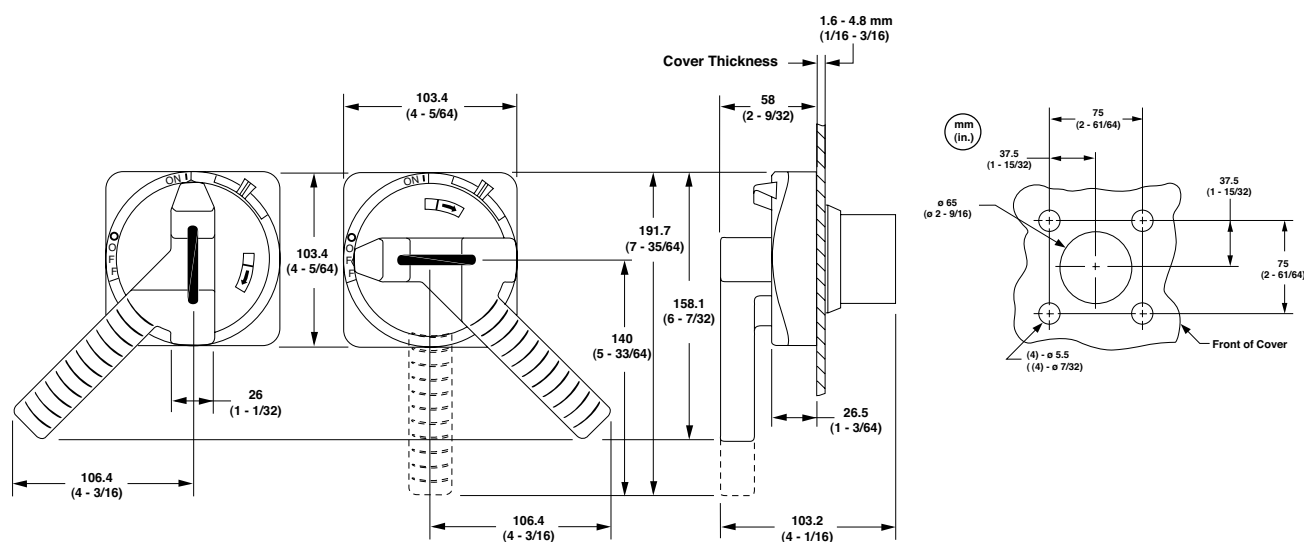


L10 Power Wire Installation

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

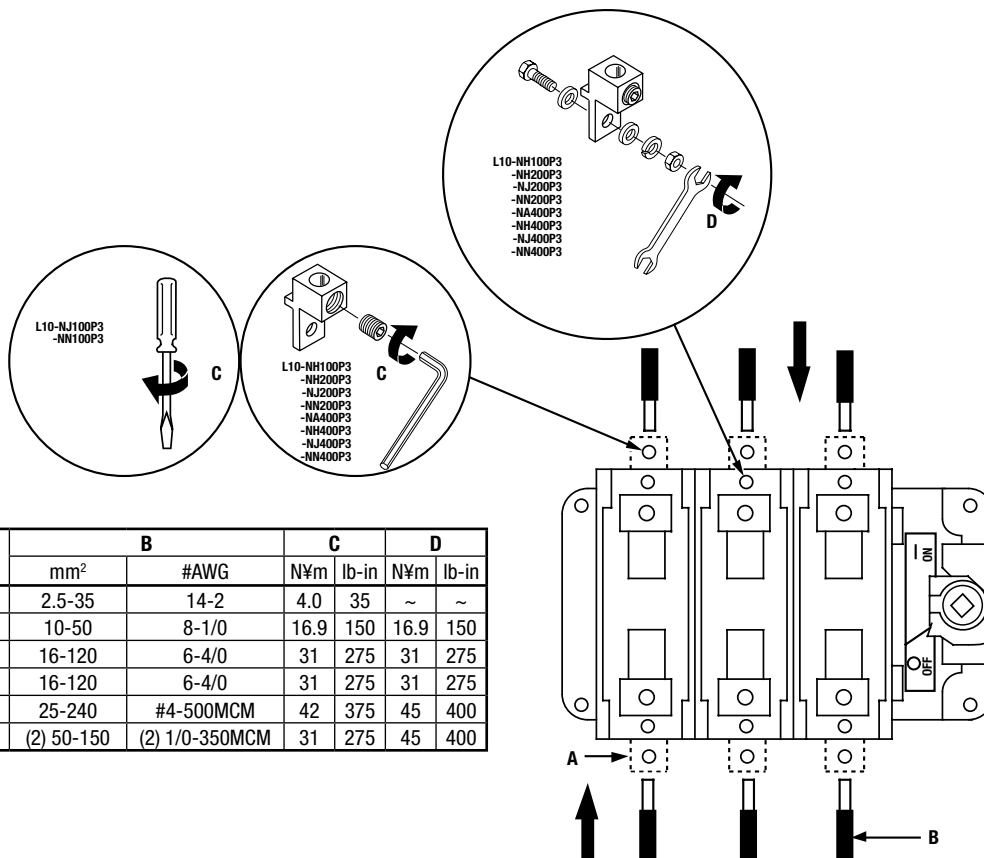

Dimension Reference	A	B		C		D	
		mm ²	#AWG	N¥m	lb-in	N¥m	lb-in
C1, C2	L10-LE1	2.5-35	14-2	4.0	35	~	~
D1	L10-LF1	10-50	8-1/0	16.9	150	16.9	150
	L10-LF1	16-120	6-4/0	31	275	31	275
D2	L10-LF1	16-120	6-4/0	31	275	31	275
E1	L10-LG1	25-240	#4-500MCM	42	375	45	400
F1	L10-LH1	(2) 50-150	(2) 1/0-350MCM	31	275	45	400


L10 Fuse Installation

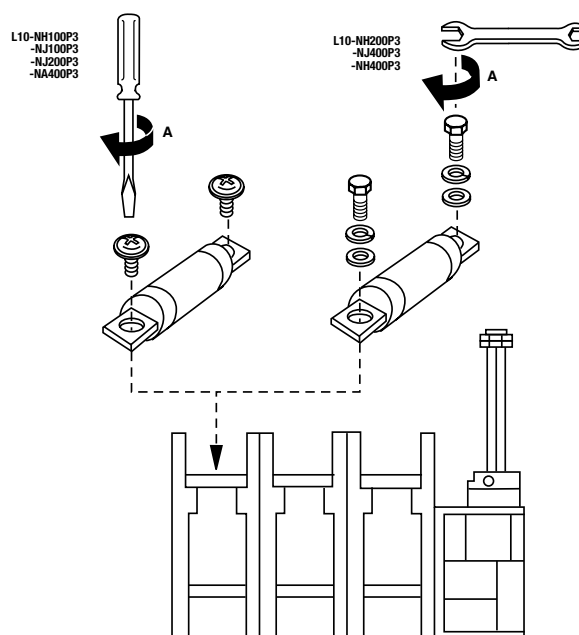

Catalog Number	A	
	N¥m	lb-in
L10-NJ100P3	4.0	35
L10-NJ200P3	4.0	35
L10-NH100P3	6.2	55
L10-NA400P3	6.2	55
L10-NH200P3	16	140
L10-NH400P3	16	140
L10-NJ400P3	22	200

Type 3/4/12 - Watertight, Dusttight Sheet Metal Enclosure (100A)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

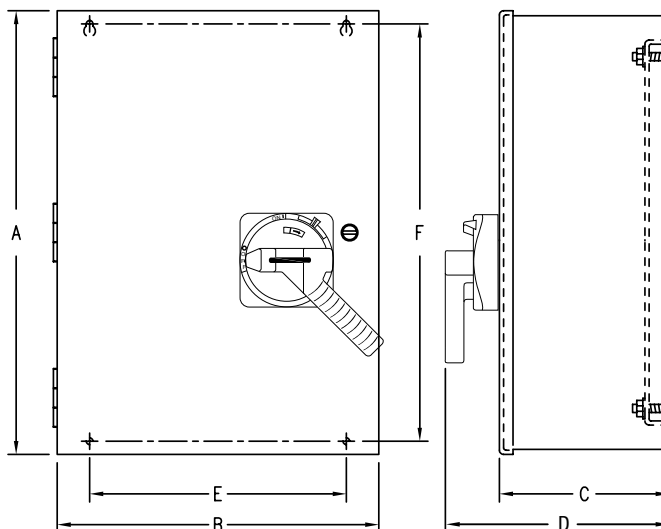

Amps	Type	Dim. Ref.	A	B	C	D	E	F	G	H
100	Fused & Non-fused	C1	406 (16.00)	406 (16.00)	224 (8.80)	282 (11.10)	368 (14.5)	368 (14.5)	178 (7)	315 (12-25/64)

Type 3/4/12 - Watertight, Dusttight Sheet Metal Enclosure (200 & 400A)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

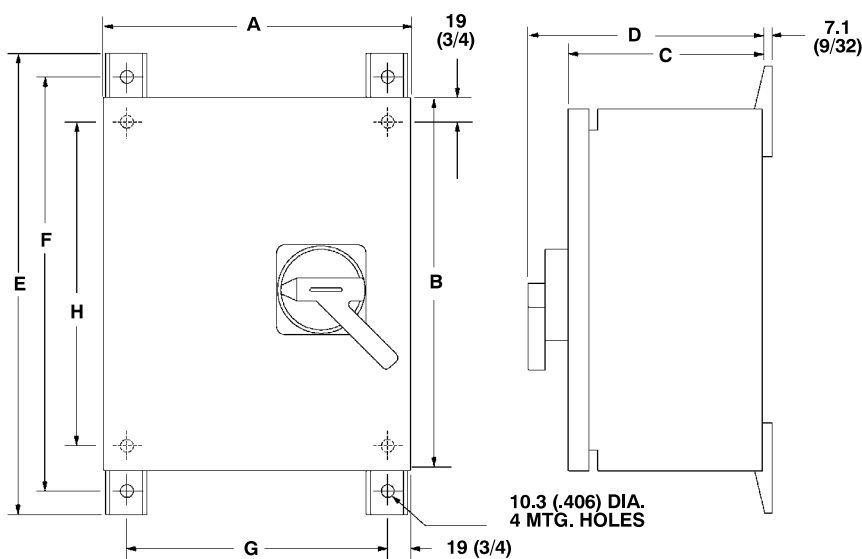

Amps	Type	Dim. Ref.	A	B	C	D	E	F	G	H
200	Fused & Non-Fused	D1	406 (16)	610 (24)	224 (8-51/64)	282 (11-5/64)	688 (27-5/64)	650 (25-9/16)	368 (13-31/64)	572 (22-1/2)
400	Fused & Non-Fused	F1	610 (24)	762 (30)	326 (12-51/64)	384 (15-5/64)	840 (33-5/64)	802 (31-9/16)	572 (22-1/2)	724 (28-1/2)

Type 4/4X Watertight, Corrosion-Resistant Stainless Steel Enclosure (100A)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

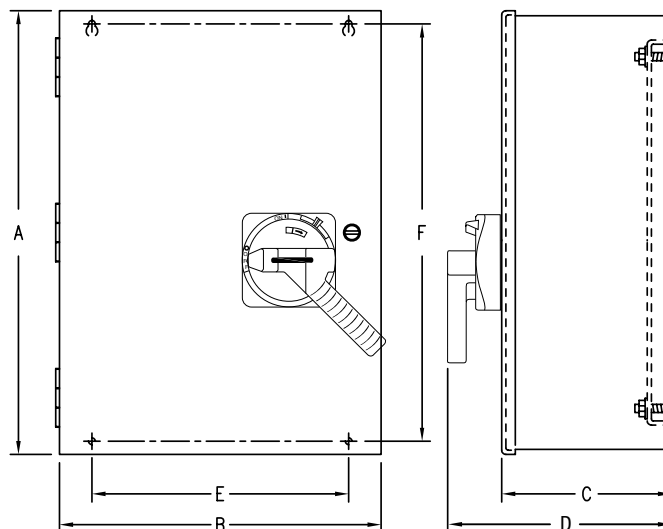

Amps	Type	Dim. Ref.	A	B	C	D	E	F	G	H
100	Fused & Non-fused	C1	406 (16.00)	406 (16.00)	224 (8.80)	282 (11.10)	368 (14.5)	368 (14.5)	178 (7)	315 (12-25/64)

Type 4/4X Watertight, Corrosion-Resistant Stainless Steel Enclosure (200 & 400A)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

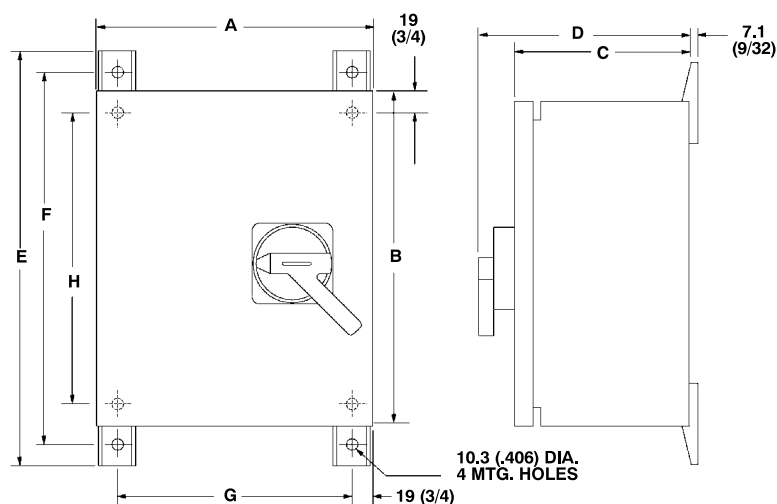

Amps	Type	Dim. Ref.	A	B	C	D	E	F	G	H
200	Fused & Non-Fused	D1	406 (16)	610 (24)	224 (8-51/64)	282 (11-5/64)	688 (27-5/64)	650 (25-19/32)	368 (14-1/2)	572 (22-1/2)
400	Fused & Non-Fused	F1	610 (24)	762 (30)	326 (12-51/64)	384 (15-5/64)	840 (33-5/64)	802 (31-15/32)	572 (22-1/2)	724 (28-1/2)

Type 3/4/4X/12 - Corrosion Resistant Non-Metallic Enclosure (100A)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

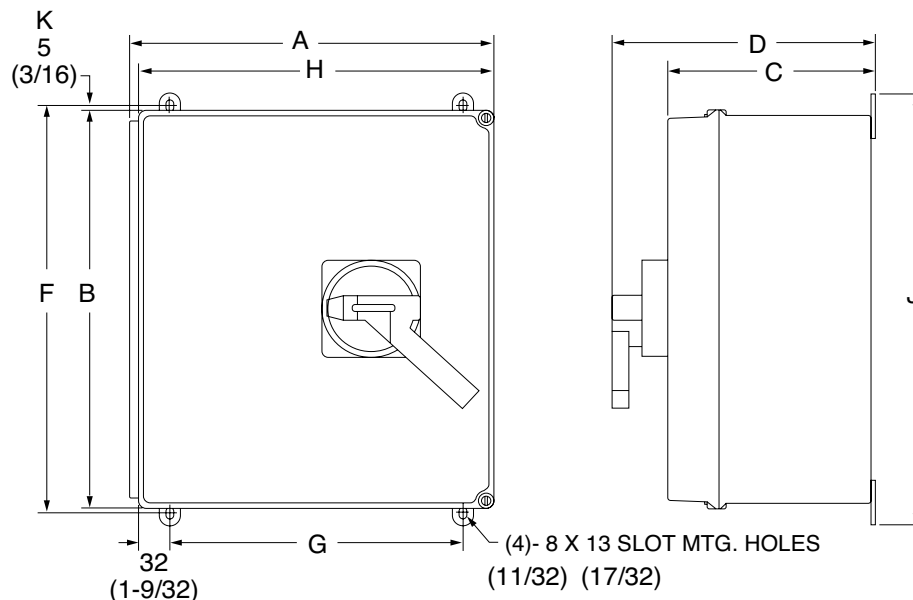

Amps	Type	Dim. Ref.	A	B	C	D	F	G	H	J	K
100	Fused & Non-Fused	C1	380 (14-31/32)	420 (16-1/4)	215 (8-31/64)	273 (10-49/64)	430 (16-61/64)	305 (12)	370 (14-9/16)	457 (18)	5 (13/64)

Type 3/4/4X/12 - Corrosion Resistant Non-Metallic Enclosure (200A)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

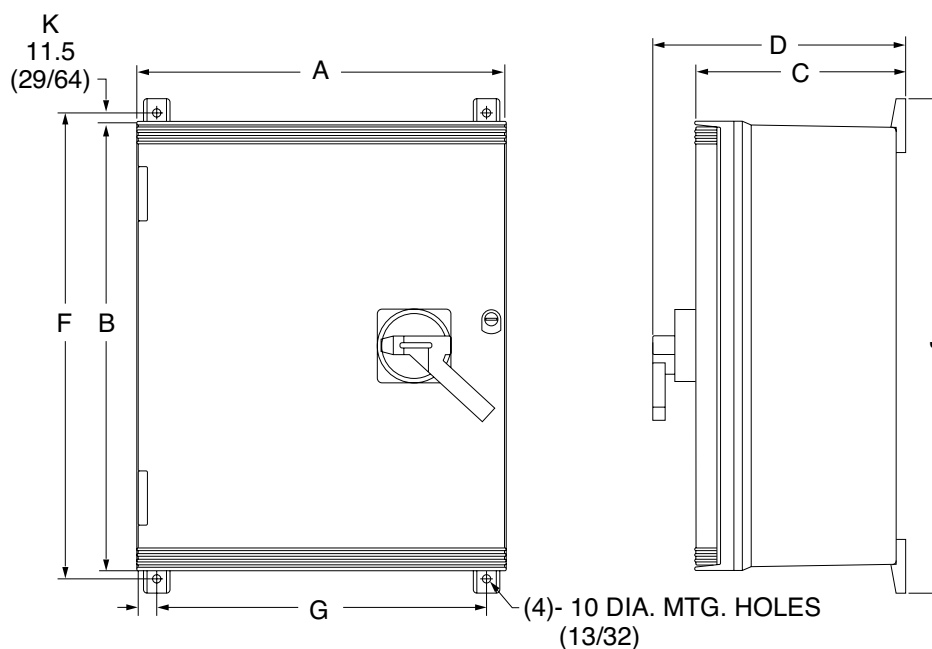

Amps	Type	Dim. Ref.	A	B	C	D	F	G	J	K
200	Fused & Non-Fused	D1	513 (20-13/64)	625 (24-5/8)	292 (11-31/64)	350 (13-25/32)	648 (25-1/2)	457 (18)	686 (27)	11.5 (29/64)

Type 3/4/4X/12 - Corrosion Resistant Non-Metallic Enclosure (400A)

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

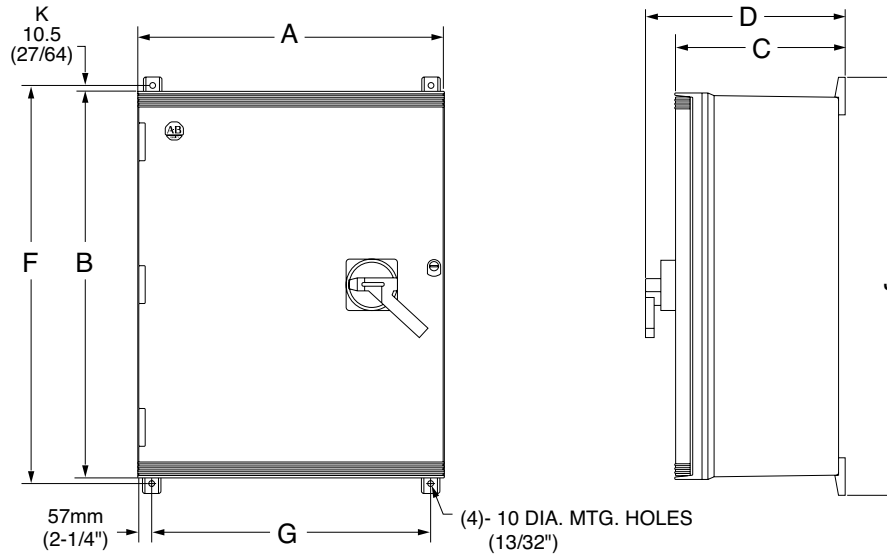

Amps	Type	Dim. Ref.	A	B	C	D	F	G	J	K
400	Fused & Non-Fused	F1	612 (24 1/8)	775 (30 33/64)	343 (13 31/64)	401 (15 23/32)	796 (31 31/32)	555 (21 7/8)	834 (32 27/32)	10.5 (13/32)