


LE7 Front Mount with Box Lugs (3 & 4 Pole)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

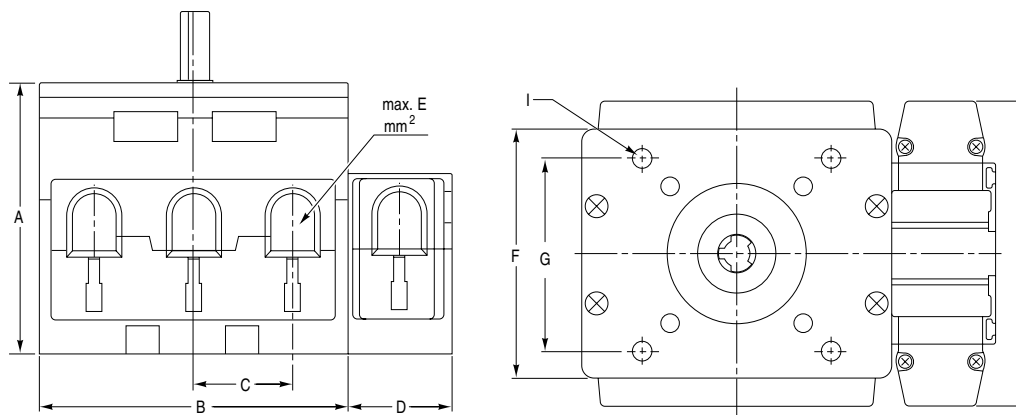

	A	B	C	D	E	F	G	H	I
125A	91 (3-19/32)	112 (4-13/32)	36 (1-13/32)	38 (1-1/2)	95 (3-23/64)	88 (3-7/16)	68 (2-5/8)	108 (4-1/4)	M5 (3/16)
160A	91 (3-19/32)	112 (4-13/32)	36 (1-13/32)	38 (1-1/2)	95 (3-23/64)	88 (3-7/16)	68 (2-5/8)	108 (4-1/4)	M5 (3/16)
250A	103 (4-3/64)	145 (5-23/32)	44 (1-23/32)	52.5 (2-1/16)	185 (7-9/32)	88 (3-7/16)	68 (2-5/8)	120 (4-11/16)	M5 (3/16)
315A	103 (4-3/64)	145 (5-23/32)	44 (1-23/32)	52.5 (2-1/16)	185 (7-9/32)	88 (3-7/16)	68 (2-5/8)	120 (4-11/16)	M5 (3/16)

LF7 Front Mount with Bolt-on Terminals (3 & 4 Pole)


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

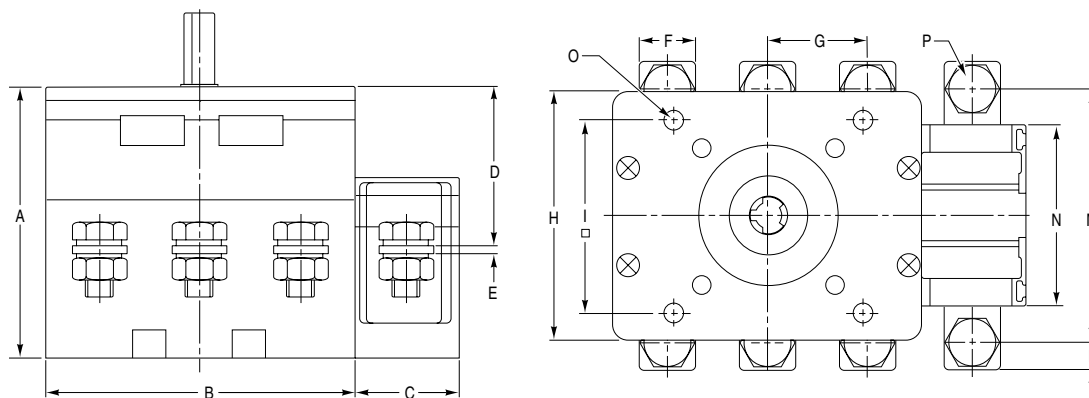

	A	B	C	D	E	F	G	H	I	L	M	N	O	P
125A	91 (3-19/32)	112 (4-13/32)	38 (1-1/2)	65.5 (2-9/16)	3 (1/8)	2 (3/32)	36 (1-13/32)	88 (3-7/16)	68 (2-5/8)	10 (13/32)	90 (3-17/32)	64 (2-17/32)	M5 (3/16)	M10 (3/8)
160A	91 (3-19/32)	112 (4-13/32)	38 (1-1/2)	65.5 (2-9/16)	3 (1/8)	2 (3/32)	36 (1-13/32)	88 (3-7/16)	68 (2-5/8)	10 (13/32)	90 (3-17/32)	64 (2-17/32)	M5 (3/16)	M10 (3/8)
250A	103 (4-3/64)	145 (5-23/32)	52.5 (1-22/32)	60.4 (2-3/8)	4 (5/32)	2 (3/32)	44 (1-23/32)	88 (3-7/16)	68 (2-5/8)	13 (1/2)	100 (3-15/16)	70 (2-3/4)	M5 (3/16)	M12 (15/32)
315A	103 (4-3/64)	145 (5-23/32)	52.5 (1-22/32)	60.4 (2-3/8)	4 (5/32)	2 (3/32)	44 (1-23/32)	88 (3-7/16)	68 (2-5/8)	13 (1/2)	100 (3-15/16)	70 (2-3/4)	M5 (3/16)	M12 (15/32)


LA7 Base Mount with Box Lugs (3 & 4 Pole)

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

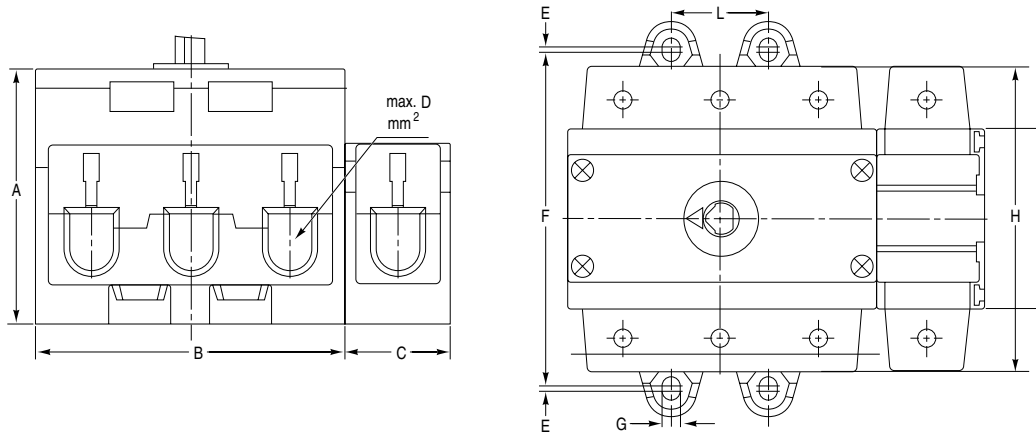

	A	B	C	D	E	F	G	H	I	L
125A	91 (3-19/32)	112 (4-13/32)	38 (1-1/2)	95 (3-23/64)	2 (3/32)	118 (4-5/8)	6.4 (1/4)	108 (4-1/4)	64 (2-17/32)	36 (1-13/32)
160A	91 (3-19/32)	112 (4-13/32)	38 (1-1/2)	95 (3-23/64)	2 (3/32)	118 (4-5/8)	6.4 (1/4)	108 (4-1/4)	64 (2-17/32)	36 (1-13/32)
250A	98 (3-27/32)	145 (5-23/32)	52.5 (1-23/32)	185 (7-9/32)	2 (3/32)	140 (5-1/2)	6.4 (1/4)	126 (4-15/16)	70 (2-3/4)	44 (2-1/16)
315A	98 (3-27/32)	145 (5-23/32)	52.5 (1-23/32)	185 (7-9/32)	2 (3/32)	140 (5-1/2)	6.4 (1/4)	126 (4-15/16)	70 (2-3/4)	44 (2-1/16)


LB7 Base Mount with Bolt-on Terminals (3 & 4 Pole)

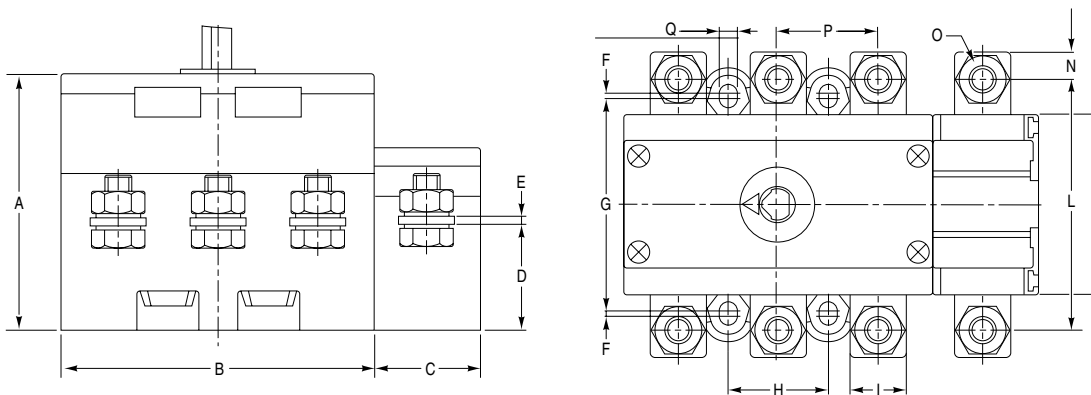

	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
125A	91 (3-19/32)	112 (4-13/32)	38 (1-1/2)	35.5 (1-7/16)	3 (1/8)	2 (3/32)	76 (3)	36 (1-13/32)	20 (3/4)	90 (3-17/32)	64 (2-17/32)	10 (13/32)	M10 (3/8)	36 (1-13/32)	6.4 (1/4)
160A	91 (3-19/32)	112 (4-13/32)	38 (1-1/2)	35.5 (1-7/16)	3 (1/8)	2 (3/32)	76 (3)	36 (1-13/32)	20 (3/4)	90 (3-17/32)	64 (2-17/32)	10 (13/32)	M10 (3/8)	36 (1-13/32)	6.4 (1/4)
250A	98 (3-27/64)	145 (5-23/32)	52.5 (1-23/32)	38.6 (1-1/2)	4 (5/32)	2 (3/32)	80 (3-1/8)	44 (1-23/32)	26 (1-1/64)	100 (3-15/16)	70 (2-3/4)	13 (1/2)	M12 (15/32)	44 (1-23/32)	6.4 (1/4)
315A	98 (3-27/64)	145 (5-23/32)	52.5 (1-23/32)	38.6 (1-1/2)	4 (5/32)	2 (3/32)	80 (3-1/8)	44 (1-23/32)	26 (1-1/64)	100 (3-15/16)	70 (2-3/4)	13 (1/2)	M12 (15/32)	44 (1-23/32)	6.4 (1/4)


Box Lug Ground and Neutral Terminal

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

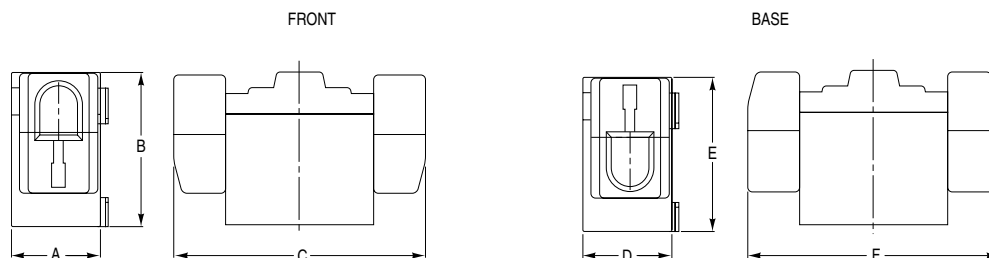


	A	B	C	D	E	F
125 / 160A	37.8 (1-1/2)	64 (2-17/32)	108 (4-1/4)	37.8 (1-1/2)	64 (2-17/32)	108 (4-1/4)
250 / 315A	52.3 (2-1/16)	71.1 (2-25/32)	126 (4-15/16)	52.3 (2-1/16)	80.6 (3-1/8)	126 (4-15/16)

Bolt-on Ground and Neutral Terminal

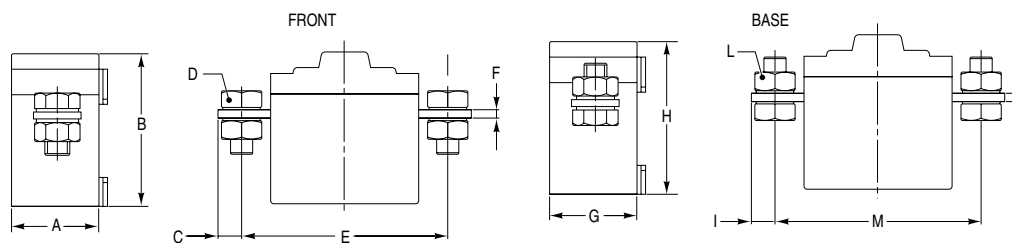

	A	B	C	D	E	F	G	H	I	L	M	N
125 / 160A	37.8 (1-1/2)	64 (2-17/32)	10 (13/32)	M10 (13/32)	90 (3-17/32)	3 (1/8)	37.8 (1-1/2)	64 (2-17/32)	10 (13/32)	M10 (13/32)	90 (3-17/32)	3 (1/8)
250 / 315A	52.3 (2-1/16)	68 (2-21/32)	13 (1/2)	M12 (15/32)	100 (3-15/16)	4 (5/32)	52.3 (2-1/16)	68 (2-21/32)	13 (1/2)	M12 (15/32)	100 (3-15/16)	4 (5/32)



Auxiliary Contacts

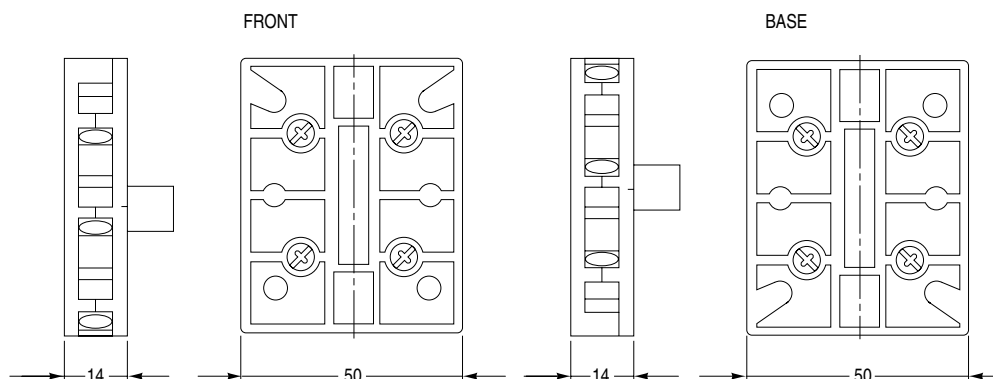




Terminal Cover

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

	A	B
125 / 160A	76.2 (3)	95 (3-3/4)
250 / 315A	88 (3-15/32)	109.5 (4-5/16)




Door Clutches

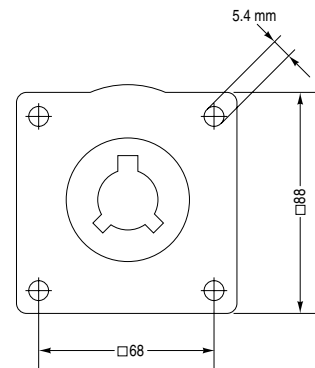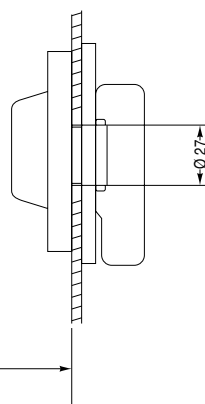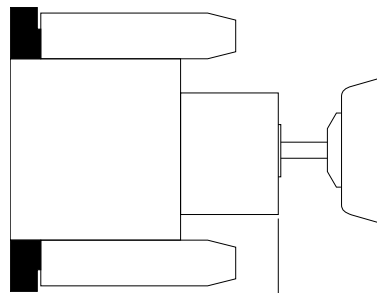


L for Standard Shaft
93 – 199mm
(3-21/32" – 7-27/32")

Shaft must be cut to length at installation.




Switch Handle Assemblies (Types A, I, G & N small)

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

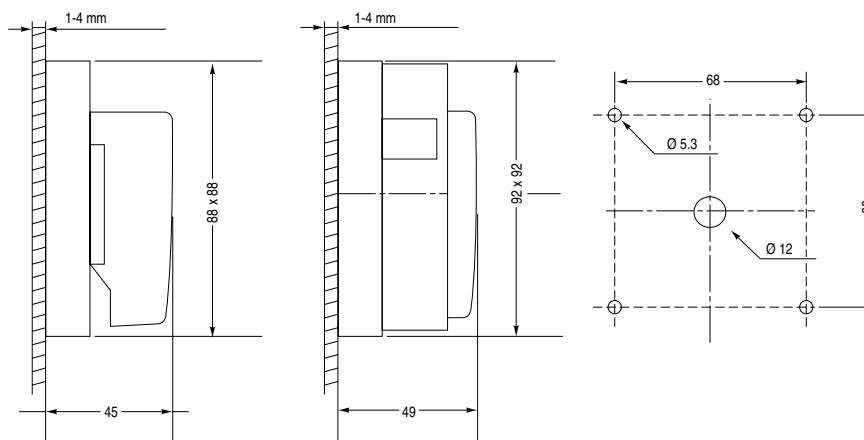

Switch Handle Assemblies (Types A, I, G & N large)

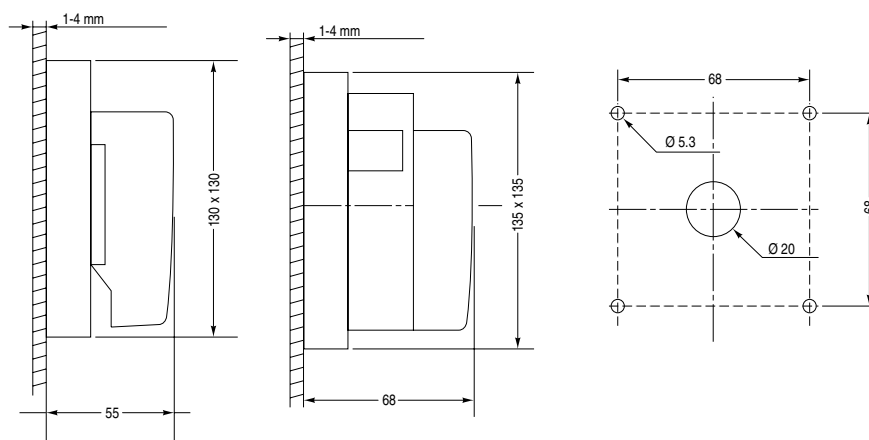

Additional Name Plate

Frame and legend snap on to Switch Handle Assembly frame. Fits all Switch Handle Assemblies.

